















X-SENSE

Your Trusted Home Safety Innovator



CATALOGUE 2023
X-SENSE INNOVATIONS CO., LTD.



 <p>(XS01-M)</p> <p>Link+ Pro Smoke Alarm</p> 	 <p>(XC01-M)</p> <p>Link+ Pro CO Alarm</p> 	 <p>(XH02-M)</p> <p>Link+ Pro Heat Alarm</p> 	
 <p>(SWS51)</p> <p>Smart Water Leak Sensor</p> 	 <p>(STH51)</p> <p>Smart Thermometer Hygrometer</p> 	 <p>(SAL51)</p> <p>Smart Smoke and CO Alarm Listener</p> 	 <p>(SAL100)</p> <p>Smart Smoke and CO Alarm Listener</p> 

Link+ Pro

- Link+ Pro is an upgraded technology by X-Sense, which offers 2 connectivity options to cater to your preferences.
- When linked to the base station, devices maintain wireless interconnection, and additionally you'll receive real-time notifications through the app.
- Alternatively, Link+ Pro units can independently connect with other Link+ or Link+ Pro series devices, even without the SBS50 base station. These devices form an interlinked network, where all will sound if one is triggered to provide maximum safety.





XS01-M

Link+ Pro Smoke Alarm

Technical Specifications

Power Supply	Replaceable 3 V CR123A lithium battery
Product Lifespan	10 years
Battery Life	5 years
Sensor Type	Photoelectric
Safety Standard	EN 14604:2005+AC:2008
Operating Temperature	4.4–37.8°C (40–100°F)
Alarm Loudness	≥ 85 dB at 3 m (10 ft) @ 3.2 ± 0.3 kHz pulsing alarm
Operating Frequency	868 MHz
Maximum Number of Interconnected Units	24 wireless units (only compatible with X-Sense Link+ Pro and Link+ wireless alarms)
Transmission Range	Over 500 m in open air
App	X-Sense Home Security (both Android and iOS supported)
Wi-Fi Frequency	2.4 GHz (incompatible with 5 GHz Wi-Fi network)

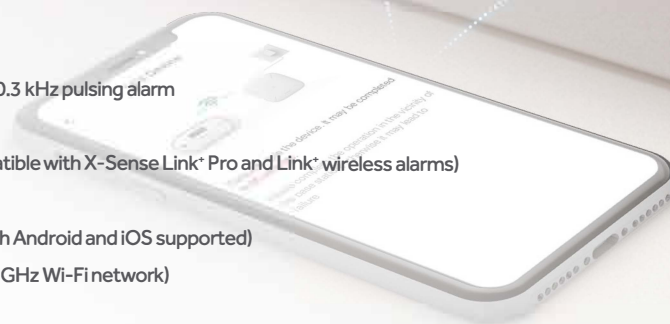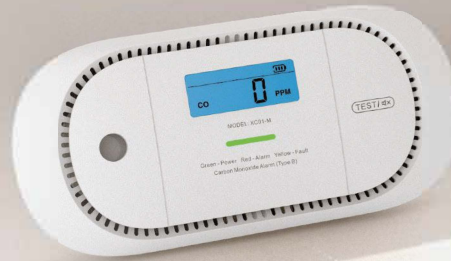

XC01-M

Link+ Pro Carbon Monoxide Alarm

Technical Specifications

Power Supply	CR123A or CR2/3A (replaceable battery)
Product Lifespan	10 years
Battery Life	5 years
Sensor Type	Electrochemical
Safety Standard	EN 50291-1:2018
Operating Temperature	4.4–37.8°C (40–100°F)
Alarm Loudness	≥ 85 dB at 3 m (10 ft) @ 3.2 ± 0.3 kHz pulsing alarm
Operating Frequency	868 MHz
Maximum Number of Interconnected Units	24 wireless units (only compatible with X-Sense Link+ Pro and Link+ wireless alarms)
Transmission Range	Over 500 m in open air
App	X-Sense Home Security (both Android and iOS supported)
Wi-Fi Frequency	2.4 GHz (incompatible with 5 GHz Wi-Fi network)



XH02-M

Link+ Pro Heat Alarm

Technical Specifications

Power Supply	Connected to base station: 7-year sealed lithium battery (non-replaceable) Not connected to base station: 10-year sealed lithium battery (non-replaceable)
Sensor Type	NTC thermistor
Heat Sensitivity	129–149°F (54–65°C)
Safety Standard	BS 5446-2:2003
Operating Temperature	40–100°F (4.4–37.8°C)
Alarm Loudness	≥ 85 dB at 10 ft (3 m) @ 3.2 ± 0.3 kHz pulsing alarm
Operating Frequency	868 MHz
Maximum Number of Interconnected Units	24 wireless units (only compatible with X-Sense Link+ Pro and Link+ wireless alarms)
Transmission Range	Over 500 m in open air
App	X-Sense Home Security (both Android and iOS supported)
Wi-Fi Frequency	2.4 GHz (incompatible with 5 GHz Wi-Fi network)




SWS51

Water Leak Sensor

Technical Specifications

Power Supply	Replaceable 2 × 1.5 V AAA batteries
Operating Life	5 years
Connection Distance (in open air)	500 m
Battery Life	3 years
Sensor Type	Sensor probe
Operating Temperature	32–122°F (0–50°C)
Operating Relative Humidity	≤ 90% RH (non-condensing)
Alarm Volume	110 dB
Waterproof Rating	IP66
App	X-Sense Home Security (both Android and iOS supported)
Wi-Fi Frequency	2.4 GHz (incompatible with 5 GHz Wi-Fi network)

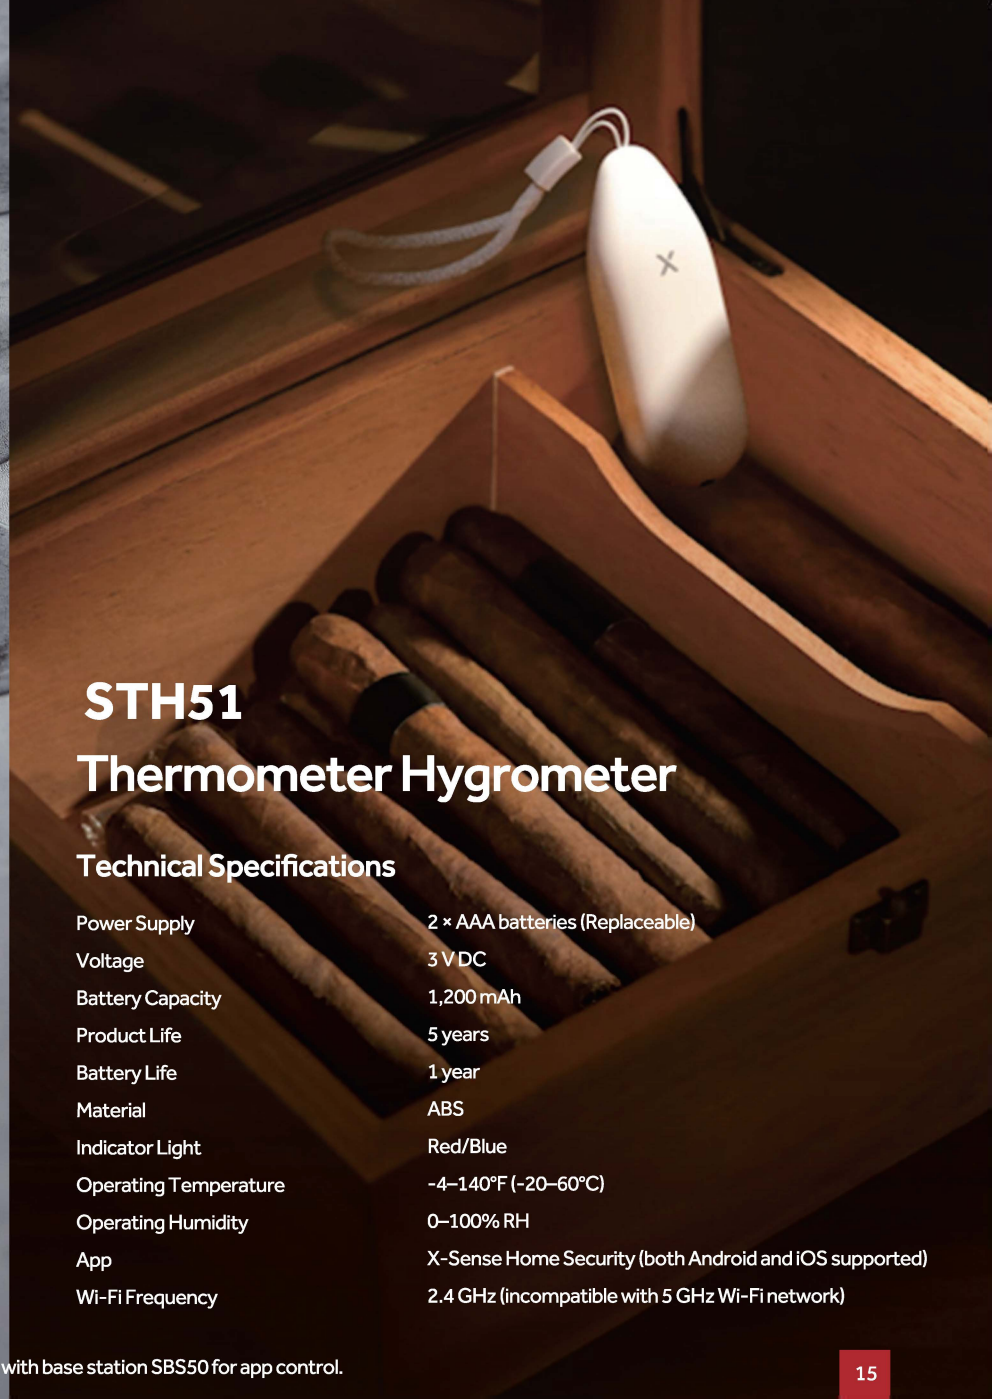

STH51

Thermometer Hygrometer

Technical Specifications

Power Supply	2 × AAA batteries (Replaceable)
Voltage	3 V DC
Battery Capacity	1,200 mAh
Product Life	5 years
Battery Life	1 year
Material	ABS
Indicator Light	Red/Blue
Operating Temperature	-4–140°F (-20–60°C)
Operating Humidity	0–100% RH
App	X-Sense Home Security (both Android and iOS supported)
Wi-Fi Frequency	2.4 GHz (incompatible with 5 GHz Wi-Fi network)

*These products are required to work with base station SBS50 for app control.

X-SENSE

Your Trusted Home Safety Innovator

Website:www.x-sense.com

Telephone:+86 (0)755-22670560

Email:partners@x-sense.com

Address: B4-503-D, Tower B, Kexing Science Park, No.15 Keyuan Road,
Technology Park Community, Yuehai Avenue, Nanshan District,
Shenzhen, 518057, CHINA

X-Sense Innovations Co., Ltd.

Deltronic

EA Rosengrensgata 4, 421 31 Västra Frölunda

Website: www.deltronic.se

Telephone: +46-31-140800

Email:info@deltronic.se